Technical specification for TAB traction 2V cells type

2V 10PzRM1400



Technical data

Nominal voltage of cells:	2,0 V
Capacity C_5:	1400 Ah
Discharge current:	C_5/5h = 280,0 A
Final discharge voltage/cell	1,70 V/cell
Nominal S.G. of electrolyte:	1,29 ± 0,01 kg/l
Rated temperature:	30°C
Specified torque for poll screws:	20-25 Nm
Ventilation requirement	EN IEC 62485-3

Dimensions and weight of the cell (EN IEC 60254-2)

Width (a)	191 mm
Length (b)	198 mm
Height h1	686 mm
Height h2	709 mm
Wet weight	76,0 kg ±5%

Design:

Positive electrode	Tubular type with non-woven polyester gauntlet and solid grids
Negative electrode	Pasted grid plate with long life expander material in LA-lead alloy
Separation	Polyethylene (PE) micro porous separator
Electrolyte	Sulphuric acid with a density of 1,29 kg/l
Container	Polypropylene (PP) box and lid
Pole	Welded type or bolt-on with M10 brass insert

Execution of cells and batteries

Flooded - Electrolyte-charged version	A battery /cell can be installed immediately, it is already filled up with electrolyte and electrically charged.

TAB Tovarna akumulatorskih baterij d.d., Polena 6, SI - 2392 Mežica, Slovenija **Phone:** +386 2 87 02 300 **Email:** info@tab.si

Recommended optional systems

TAB AQUALESS	Aqua 1	Aqua 2	Aqua 3
Refilling Interval in weeks	4	8	12-13
Charger	50 Hz	HF	HF + Air Matic
Charging Factor	1.2	1.10–1.11	1.07–1.08
Electrolyte Level indicator	●	●	●
Central Water Filling System	○	○	○
Air Matic	○	○	●

Condition: water refilling intervals are based on 80% DOD - 1 cycle per day; 5 days per week

○ OPTIONAL ● SERIAL

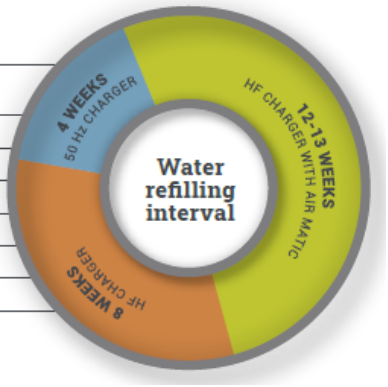

Discharge characteristics

EN IEC 60254-1 cycles 1500

Depth of discharge (DOD) up to 80%*

* Deep discharges more than 80% DOD or discharges beyond final discharge voltages (dependent on discharge current) should be avoided.

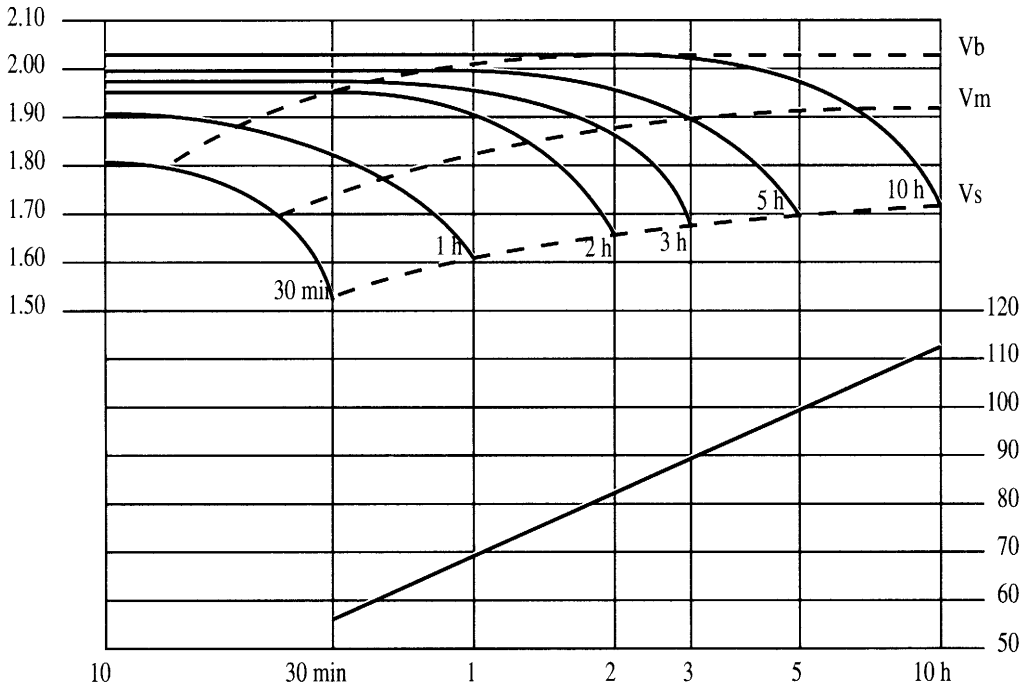

Discharging time

Cells manufactured to existing ISO 9001, ISO 14001 and EN/IEC 60254 standards.